


SEE HYDRAULIC POWER UNIT													
A	M10x45	M12x45	M14x55	M16x65	M18x70								
N18	M30x60 Ch=46					M60 x p. 3.5 L=120 Ch=80							
Q F	200	200	200	200	200	200	215	215	215	260	260	260	
ØT	133	140	150	150	160	174	180	190	202	242	270	297	
ØG	/	133	133	133	155	166	190	190	202	249	278	304	
e cyl	3.6	4	4	4	4.5	4.5	5	5	5.6	8	8	10	
ØD	101.6	114.3	114.3	114.3	133	139.7	159	159	177.8	219.1	244.5	273	
OIL lxm	7	9	9	9	12	13.5	17.5	17.5	22	32.5	41	50	
WEIGHT Kg	15	20	21	23	26	28	33	34	40	50	63	79	
1 m Additional	60	75	79	84	96	107	126	131	153	194	236	309	
3 m on Stroke	-	11	13	10	17	23	29	37	45	66	70	100	
Kit Joints Rod + Cylinder	-	5	5	7.5	5	5	5	5	5	6	10	10	
e	5	5	5	7.5	5	5	5	5	5	6	10	10	
ROD Ød	50	70	80	85	90	100	110	120	130	150	160	180	200

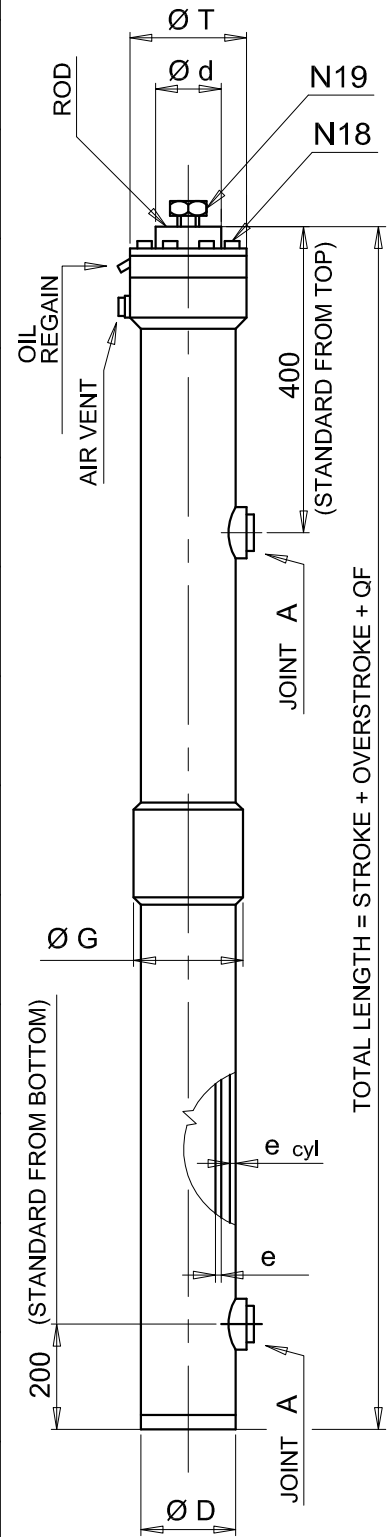

NOTE: - MORIS ITALIA PRESCRIBES THE ADOPTION OF THE RAM PROTECTION RING,
 FOR SINGLE PIECE RAMS WITH LENGHT GREATER THAN 4,5 m FOR DIAMETERS FROM 70 TO 90 mm,
 FOR SINGLE PIECE RAMS WITH LENGHT GREATER THAN 5 m FOR DIAMETER OF 100 mm,
 FOR SINGLE PIECE RAMS WITH LENGHT GREATER THAN 6 m FOR DIAMETERS FROM 110 TO 130 mm,
 IN ORDER TO AVOID BUMPS AND DAMAGE DURING THE TRANSPORT.
 - FOR DIFFERENT HEIGHTSI (> 150 mm) OF JUNCTION "A" FROM THE BOTTOM, SPECIFY IN THE PORDER.
 - ROD WITH FRONT SHOCK ABSORBER (ALL OUT) 35 mm.

UT	
----	--

INDIRECT SIDE RAM

DATE	07/17
DWG Nr	9130