

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)

230 V-400 V-415 V ; (50/60 HZ)

MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)

PUMP: From 30 up to 150 L/min.

PRESSURE: From 12 up to 45 BAR


OIL QUANTITY	
MINIMUM LEVEL	50 litres
USEFUL OIL	85 litres
TOTAL OIL	135 litres

POWER UNIT WEIGHT WITHOUT OIL	125 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: 15-150 L/1'
- REF TABLE # 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2)
- OUTLET (*) WITH FLEX-PIPE 1"1/4 (M45x2)
- AUXILIARY TANK AGAINST POWER UNIT OIL SPILLS: SEE TAB. 9291
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT			DATA SHEET POWER UNIT CM320-MARK2	DATE 09/22
				DWG Nr. 9018/CM320-MK2

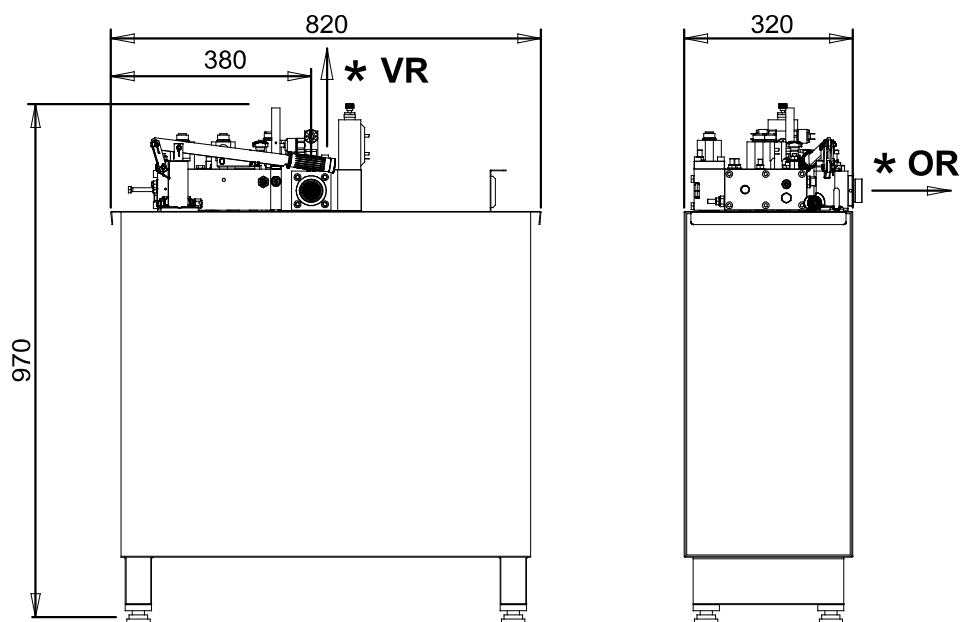

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)
230 V - 400 V - 415 V; (50/60 HZ)

MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)
WITHOUT FLYWHEEL

PUMP: From 30 up to 150 L/1'.

PRESSURE: From 12 up to 45 BAR

SPECIAL EXECUTION:

- A) PUMP 180 L/1'
- B) FLEX-PIPE 1"1/2 (M52x2)
FOR PUMP 180 L/1'
- C) HEAT EXCHANGER ARRANGEMENT
(STANDARD)
- D) CONNECTION KIT EXCHANGER
(OPTIONAL)

OIL QUANTITY

(with engine size and maximum pump)

MINIMUM LEVEL	40 litres
USEFUL OIL	90 litres
TOTAL OIL	130 litres

**EMPTY
POWER UNIT
WEIGHT**

115 KG

NOTE:

- DISTRIBUTOR: 15-150 L/1'
- REF TABLE # 9017 - 9018 TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2) or 1"1/4 (M45x2)
- CABINET ARRANGEMENT:
0884/CM3-...



OR - HORIZONTAL OUTLET

VR - VERTICAL OUTLET

UT	

TECHNIQUE SHEET
POWER UNIT: CM-320-MARK2-A

DATE	09/22
DWG N° 9018	
CM-320-MK2-A	

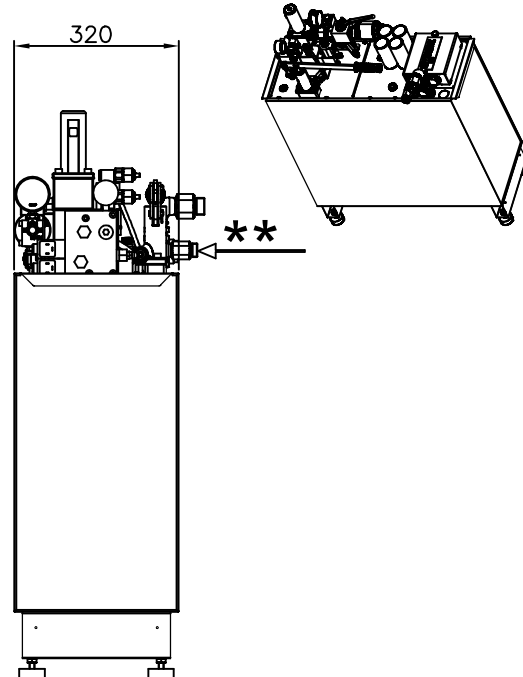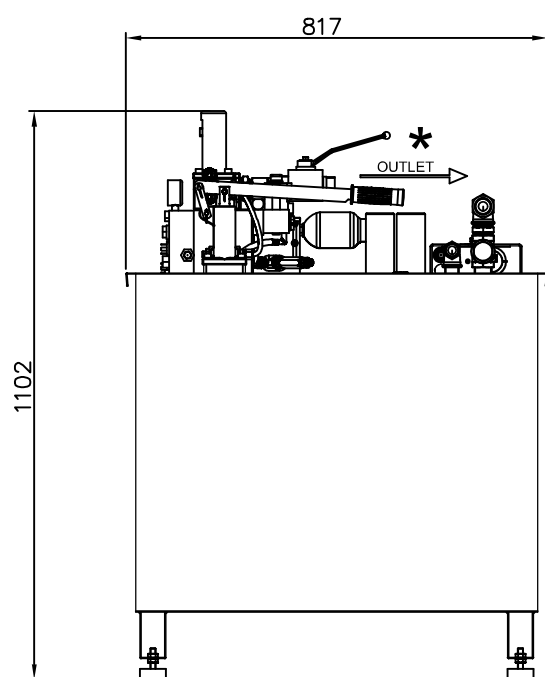

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)
230 V-400 V-415 V ; (50/60 HZ)

MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)

PUMP: From 30 up to 150 L/min.

PRESSURE: From 12 up to 60 BAR


OIL QUANTITY	
MINIMUM LEVEL	50 litres
USEFUL OIL	85 litres
TOTAL OIL	135 litres

POWER UNIT WEIGHT WITHOUT OIL	117 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: LRV-175
- REF TABLE # 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2)
- OUTLET (*) WITH FLEX-PIPE 1"1/4 (M45x2)
- AUXILIARY TANK AGAINST POWER UNIT OIL SPILLS: SEE TAB. 9291
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT			<div>DATA SHEET</div> <div>POWER UNIT CM320-MARK2-LRV</div>	DATE	11/18
				DWG Nr.	9018/CM320MK2LRV

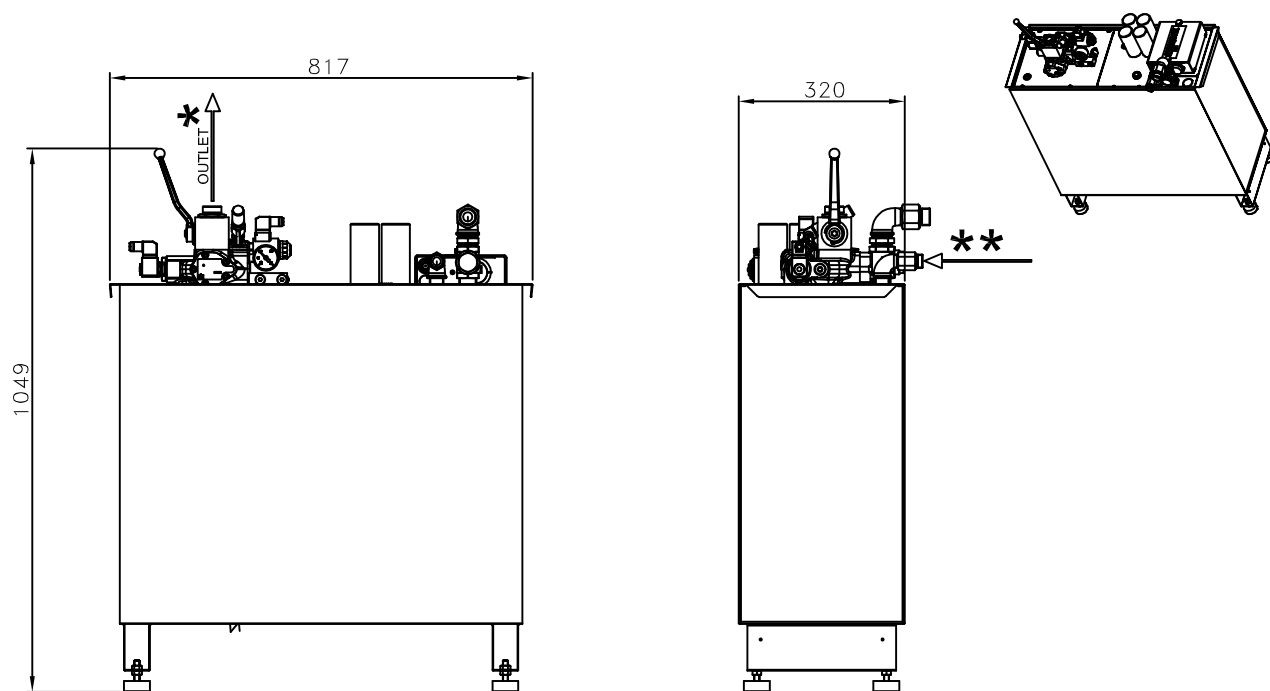

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)
230 V-400 V-415 V ; (50/60 HZ)

MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)

PUMP: From 30 up to 150 L/min.

PRESSURE: From 12 up to 60 BAR


OIL QUANTITY	
MINIMUM LEVEL	50 litres
USEFUL OIL	85 litres
TOTAL OIL	135 litres

POWER UNIT WEIGHT WITHOUT OIL	117 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: I-VALVE 250/160
- REF TABLE # 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2)
- OUTLET (*) WITH FLEX-PIPE 1"1/4 (M45x2)
- AUXILIARY TANK AGAINST POWER UNIT OIL SPILLS: SEE TAB. 9291
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT		DATA SHEET POWER UNIT CM320-MARK2-IV	DATE	10/18
			DWG Nr.	9018/CM320MK2IV

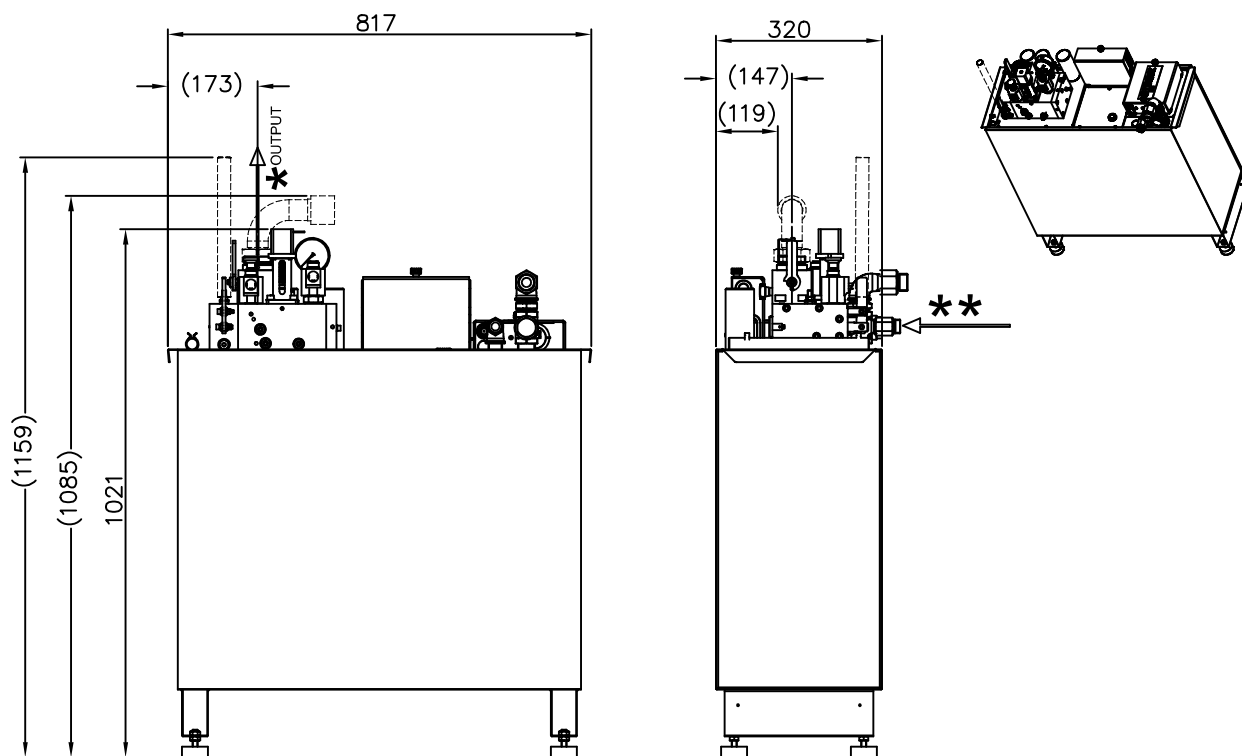

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)

230 V-400 V-415 V ; (50/60 HZ)

MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)

PUMP: From 30 up to 150 L/min.

PRESSURE: From 10 up to 50 BAR

OIL QUANTITY	
MINIMUM LEVEL	50 litres
USEFUL OIL	85 litres
TOTAL OIL	135 litres

POWER UNIT WEIGHT WITHOUT OIL	117 KG
-------------------------------------	--------

NOTE:


- DISTRIBUTOR: VEM 250
- REF TABLE # 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (★) WITH FLEX-PIPE 1" (M36x2)
- OUTLET (★) WITH FLEX-PIPE 1"1/4 (M45x2)
- AUXILIARY TANK AGAINST POWER UNIT OIL SPILLS: SEE TAB. 9291
- CABINET ARRANGEMENT: SEE CAP.16
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT	

DATA SHEET

POWER UNIT CM320-MARK2-VEM

DATE	09/21
DWG Nr.	9018/CM320MK2VEM

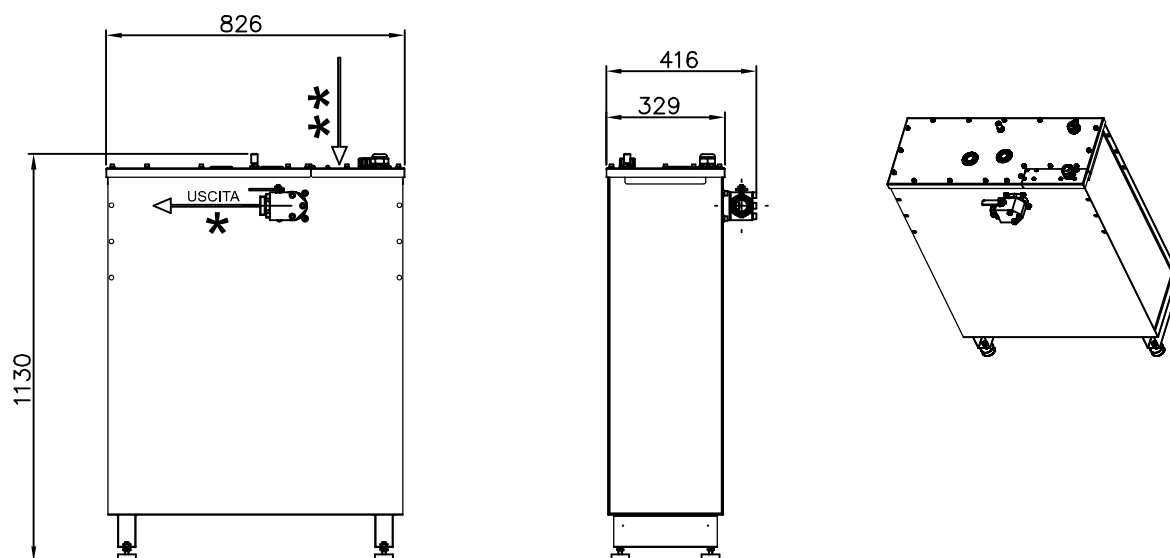

THREE-PHASE MOTOR: From 2.7 up to 20 CV (2 / 15 kW)
 230 V-400 V-415 V ; (50/60 HZ)
MONO-PHASE MOTOR: From 2 up to 8 CV (1.5 / 6 kW)
PUMP: From 30 up to 150 L/min.
PRESSURE: From 12 up to 45 BAR

OIL QUANTITY	
MINIMUM LEVEL	50 litres
USEFUL OIL	85 litres
TOTAL OIL	135 litres

POWER UNIT WEIGHT WITHOUT OIL	135 KG
-------------------------------------	--------

NOTE:

- DISTRIBUTOR: 15-150 L/1'
- REF TABLE # 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2)
- OUTLET (*) WITH FLEX-PIPE 1 1/4" (M45x2)
- AUXILIARY TANK AGAINST POWER UNIT OIL SPILLS (CM320MK2): SEE TAB. 9291
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT		DATA SHEET POWER UNIT CM320-TS	DATE
			09/22
			DWG Nr. 9018/CM320-TS